



Nokia N900 USB Replacement

In this guide, I will show you how to locate you USB port so that you can replace it if it is broken or not working.

Written By: Troy Posey



Step 1 — USB



- Turn the phone over so the screen is face down.

Step 2




- Remove the back cover by locating the slit on the bottom of the phone and lifting up.

Step 3



- Remove the battery by lifting it out of the device.

Step 4

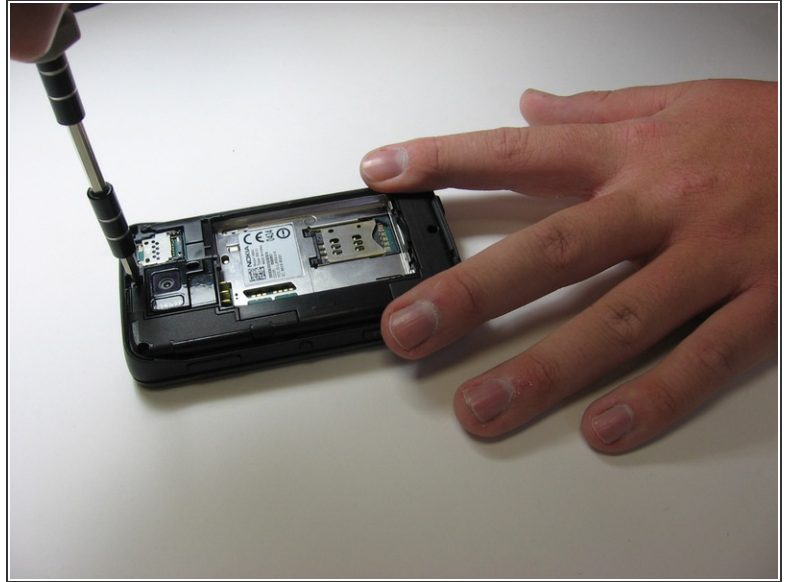

- Remove the two "L-shaped" antennas by unscrewing the following screws:
 - Four screw *M1 .4x5.0*
 - Two screw *RF1 .4x4*
- In addition to unscrewing the screws, remove the B-Cover (which will fall right out without the screws).

Step 5




- You will now have two halves of the phone.
- Grab the half of the phone that has the keyboard on it

Step 6




- Remove the keyboard by unsnapping the frame and then lifting the pad out from the device.
- Place the key pad and cover to the side for the remaining steps.

Step 7

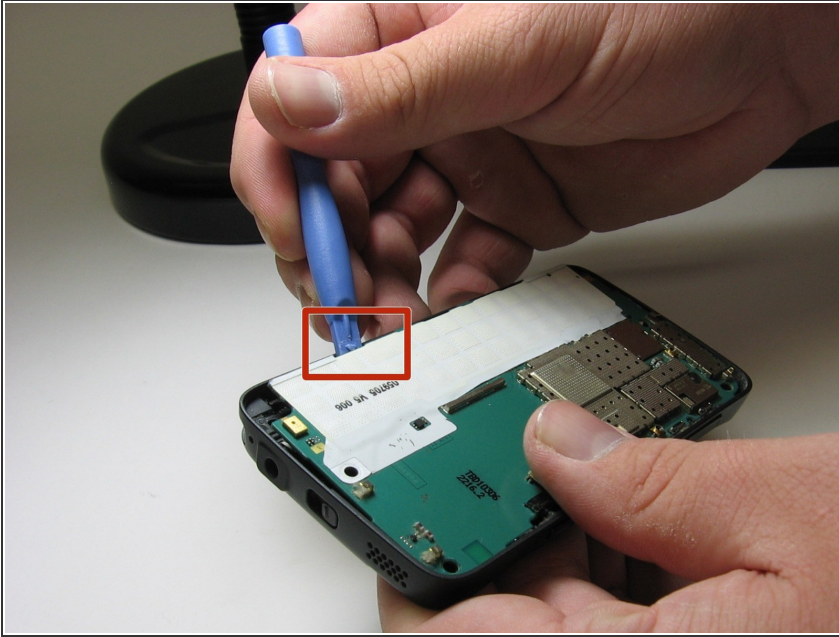

- Use a blue plastic opening tool lift the motherboard out of the back cover

Step 8

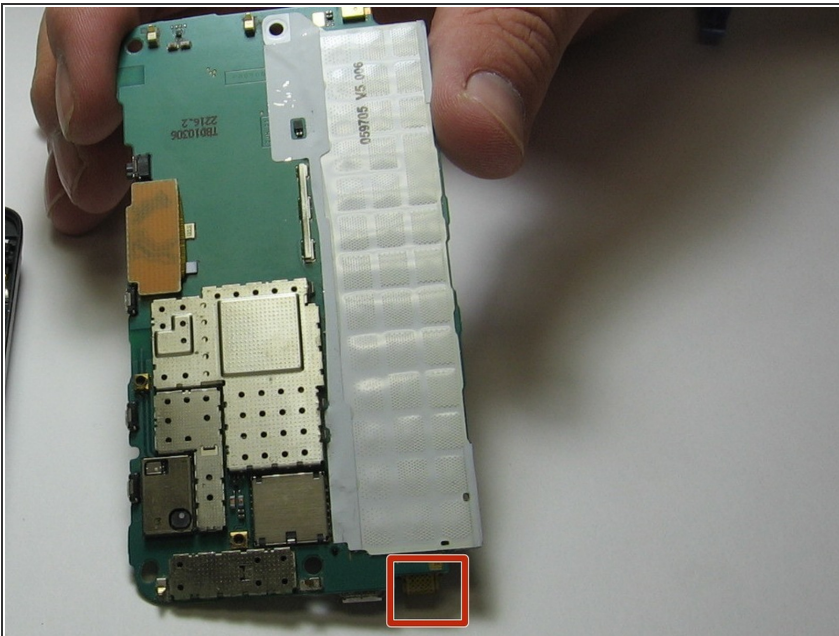

- Look at the bottom of the motherboard to find the:
 - USB Port
- Once you've located the USB Port you can search online or call the manufacturer to replace it.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-20 08:51:15 PM.